


Product Information

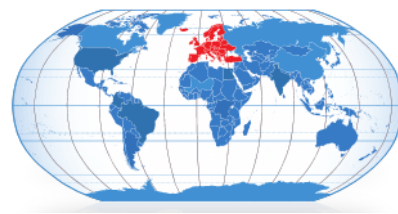


213003002

ultraLIGHT 315 Narrow Profile Wheel

Black Polypropylene wheel with two precision sealed ball bearings.



Grey Micro Cellular Polyurethane “puncture proof” tyre.

Fixing M12 x 1.0mm Pitch x 12 long thread - 19mm A/F Axle

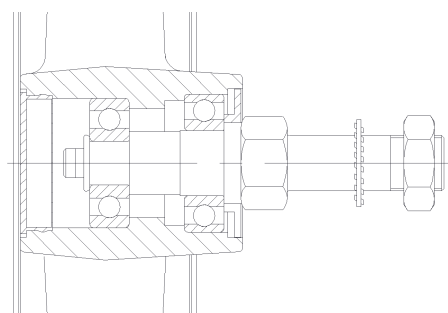

Technical Data

| | |
|-------------------------|-----------------|
| Wheel diameter | 315mm |
| Wheel tread width | 42mm |
| Tread hardness | 70°-85° Shore A |
| Tread Colour | Grey |
| Overall width | 63mm |
| Wheel colour | Black |
| Load capacity (dynamic) | 55Kg |
| Axle Fixing Torque | 35-40 Nm |
| Standard | ISO 22881 |

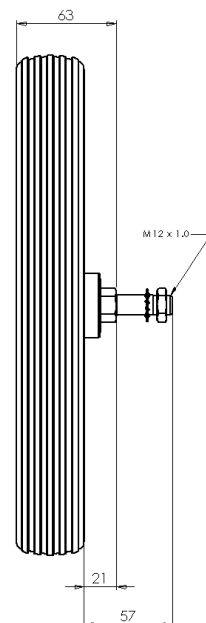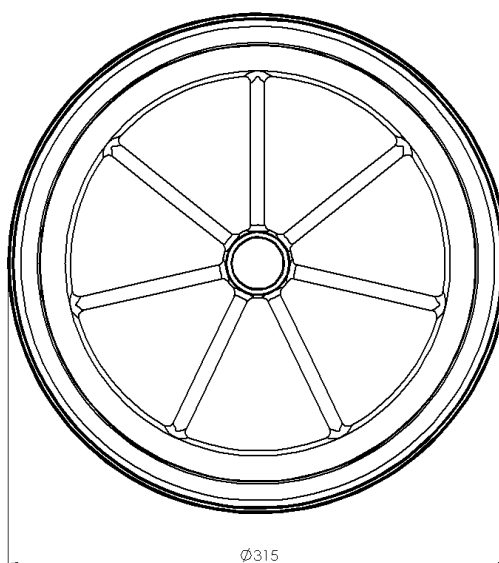

THE GLOBAL LEADER IN CASTORS AND WHEELS

Printed copies are uncontrolled, please refer to website for latest information www.colson-castors.co.uk

20/04/2015 Issue 1